

bcn
BENEDETTI LIGHTING



Lite & Bright



2024




ALTRE FINITURE SU RICHIESTA.
OTHER FINISHES ON REQUEST.



bianco
white



acciaio lucido
polished stainless steel











acciaio satinato
satin steel







cromo lucido
polished chrome

I colori per loro natura sono indicativi, ed eventuali leggere differenze sono da considerarsi nelle tolleranze. La spazzolatura delle finiture dona raffinatezza ai metalli ed è una particolarità che potrebbe variare secondo la tipologia dell'oggetto.
Colours are indicative for their own nature and any slight difference is to be considered within tolerance. Refined brushed finishes may vary according to the kind of item.

Downlights - 10









							
ocean 12	ring 14	malibù 16	newport 18	orlando 20	phoenix 22	seattle 24	atlanta 26

Courtesy Lights - 42








							
charlotte 28	daytona 30	venice 32	miami 34	colorado 36	aspen 38	alabama 40	dallas 44-46

							
bedford 48-50	savannah 52	tampa 54	sarasota 54	florida 56	portland 58	columbia 60	nevada 60









Reading Lights - 66

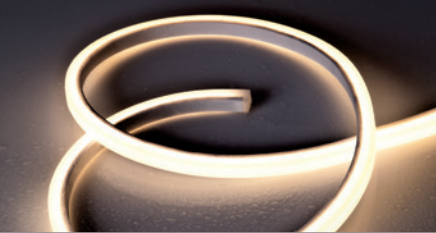							
dana 62	baltimore 62	detroit 64	boston 64	catalina 68	ventura 70	arizona 72	philly 74

Wave Neonflex - 76






						
wave neonflex side 80	wave neonflex top 80	wave neonflex small 82	wave neonflex double bending 84	wave neonflex mini side 86	wave neonflex mini top 86	accessories wave neonflex 88

Linear Lighting Systems - 90


							
mini blade one, two, three 92	blade one 94	blade two 96	blade three 98	blade four 100	blade five 102	mini flex led one 104	flex led two 106

Anti-glare - 108

							
malibù 110	newport 112	orlando 114	phoenix 116	seattle 118	atlanta 120	charlotte 122	daytona 124

				
tampa 126	sarasota 126	black neonflex 128	blade three black 130	mini blade black 131

Our collections

	Downlights	10
	Courtesy Lights	42
	Reading Lights	66

	Wave Neonflex	76
	Linear Lighting Systems	90
	Anti-glare	108



Downlights


Questa linea di faretti si distingue per l'eccellenza dei materiali impiegati e l'alta efficienza luminosa. Tutti gli articoli, orientabili compresi, hanno grado di protezione IP66, l'elegante design si integra perfettamente negli ambienti esterni ed interni. Il corpo stampato in special compound rende i prodotti estremamente versatili, ultraleggeri e compatibili con diversi tipi di superficie.

The downlights of this collection stand up for the excellence of the materials and the high efficiency of the light output. All the articles, adjustable included, are IP66 protection rate. The elegant design is perfectly suitable with both interior and exterior environments. The back-body, made of a special compound, make all the downlights ultra-light and compatible with different types of surfaces.




ocean

. 105




CODE	3479-105A-B8W 3479-105C-B8W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 8W
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 242lm 1mt 82lx 2mt 21lx 3mt 9lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 130




CODE	3479-130A-B10W 3479-130C-B10W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 10W
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 398lm 1mt 134lx 2mt 34lx 3mt 15lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 155

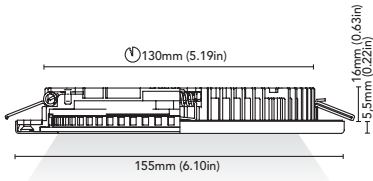

CODE	3479-155A-B12W 3479-155C-B12W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 12W
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 492lm 1mt 167lx 2mt 42lx 3mt 19lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	

. 210

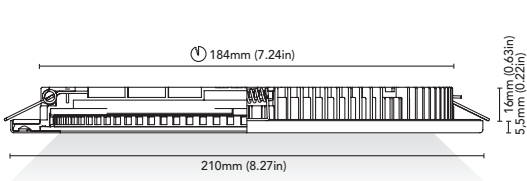


CODE	3479-210A-B18W 3479-210C-B18W
FIXTURE	FIXED CEILING LAMP
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 18W
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 865lm 1mt 290lx 2mt 73lx 3mt 32lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) STAINLESS STEEL SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	



ocean - 105, 130, 155, 210




FINISHES
20 4 34



* On request, frame 9000-RING.

ring


CODE	9000-RING130 X OCEAN 105 9000-RING155 X OCEAN 130 9000-RING180 X OCEAN 155 9000-RING235 X OCEAN 210
FIXTURE	FRAME FOR OCEAN SERIES
MATERIALS	STAINLESS STEEL AISI 316
MOUNTING SYSTEM	SCREWS

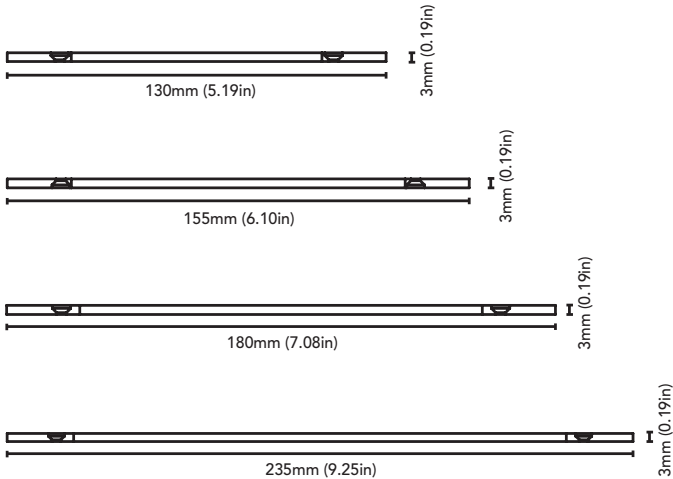

ring - 130, 155, 180, 235




ocean - 105 frame ring - 130

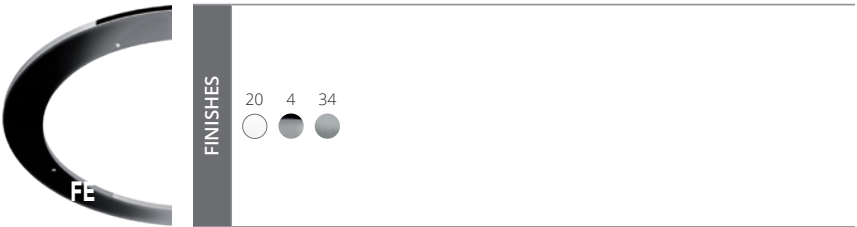




malibù

. 60




CODE	3412-60A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

. 75




CODE	3412-75A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 85



CODE	3412-85A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 95



CODE	3412-95A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



malibù - 60, 75, 85, 95







newport

. 85

. 95



CODE	3414-85A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3414-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	




newport - 85, 95






orlando

. 60




CODE	3406-60A-B1.5W 3406-60C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

. 75




CODE	3406-75A-B2W 3406-75C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame

. 85



CODE	3406-85A-B4W 3406-85C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame

. 95



CODE	3406-95A-B6W 3406-95C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
	*On request switch on the frame



orlando - 60, 75, 85, 95



*switch









phoenix

. 85

. 95




CODE	3408-85A-B2W 3408-85C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	*On request switch on the frame

CODE	3408-95A-B4W 3408-95C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	*On request switch on the frame



phoenix - 85, 95



FINISHES	20 4 34 
----------	--


*switch







seattle


. 55




CODE	3413-55A-B1.5W	
FIXTURE	FIXED DOWNLIGHT	
ADJUSTABILITY	NO	
LIGHT SOURCE	POWER LED	
POWER	1 x MAX 1,5W	
SUPPLY	8-32 Vdc - Driver on board	
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	
DIMMABLE	YES	
BEAM	WIDE	
SCREEN	OPAL	
LED COLOUR	<div>3000K</div> <div>CRI >80</div> <div>LMN 88lm</div> <div>1mt 33lx</div> <div>2mt 8lx</div> <div>3mt 4lx</div> <div></div>	
IP RATE	IP66	
WEIGHT		
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
MOUNTING SYSTEM	WIRE SPRINGS	
OPTIONAL		
LED COLOUR	2700K - 4000K - RED - BLUE	
IP RATE		


. 70




3413-70A-B2W	
FIXED DOWNLIGHT	
NO	
POWER LED	
1 x MAX 2W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
OPAL	
3000K	
CRI >80	
LMN 191lm	
1mt 70lx	
2mt 17lx	
3mt 8lx	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
WIRE SPRINGS	
2700K - 4000K - 3000K+RED	


. 80



3413-80A-B4W		
FIXED DOWNLIGHT		
NO		
POWER LED		
1 x MAX 4W		
8-32 Vdc - Driver on board		
FUSE - POLARITY REVERSE SPIKE FILTER		
YES		
WIDE		
OPAL		
3000K		
CRI		>80
LMN		323lm
1mt		123lx
2mt		30lx
3mt		14lx
IP66		
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND		
WIRE SPRINGS		
2700K - 4000K - 3000K+RED		


. 90



3413-90A-B6W	
FIXED DOWNLIGHT	
NO	
POWER LED	
1 x MAX 6W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
OPAL	
3000K	
CRI >80	
LMN 356lm	
1mt 136lx	
2mt 34lx	
3mt 15lx	
IP66	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
WIRE SPRINGS	
2700K - 4000K - 3000K+RED	



seattle - 55, 70, 80, 90









atlanta

. 80

. 90




CODE	3415-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3415-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	




atlanta - 80, 90

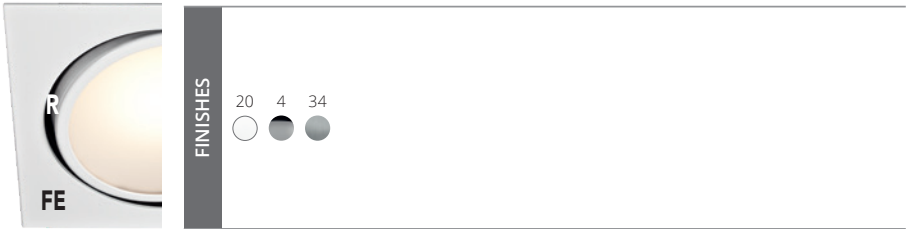





charlotte


. 55




CODE	3407-55A-B1.5W 3407-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	


. 70




CODE	3407-70A-B2W 3407-70C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	


. 80



CODE	3407-80A-B4W 3407-80C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	

. 90



CODE	3407-90A-B6W 3407-90C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	



charlotte - 55, 70, 80, 90



*switch







daytona

. 80

. 90



CODE	3409-80A-B2W 3409-80C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	*On request switch on the frame

CODE	3409-90A-B4W 3409-90C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	↕ 30°
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	*On request switch on the frame



daytona - 80, 90




*switch






venice

. 55




CODE	3411-55A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 67lm 1mt 28lx 2mt 7lx 3mt 3lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

. 70




CODE	3411-70A-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 149lm 1mt 58lx 2mt 14lx 3mt 6lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 80



CODE	3411-80A-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 225lm 1mt 90lx 2mt 22lx 3mt 10lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

. 90



CODE	3411-90A-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 260lm 1mt 95lx 2mt 24lx 3mt 11lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



venice - 55, 70, 80, 90





FINISHES	20 4 34
----------	-------------




miami


. 55




CODE	3405-55A-B1.5W 3405-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 67lm 1mt 28lx 2mt 7lx 3mt 3lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	


. 70




CODE	3405-70A-B2W 3405-70C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 149lm 1mt 58lx 2mt 14lx 3mt 6lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	


. 80



CODE	3405-80A-B4W 3405-80C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 225lm 1mt 90lx 2mt 22lx 3mt 10lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	

. 90



CODE	3405-90A-B6W 3405-90C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 260lm 1mt 95lx 2mt 24lx 3mt 11lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	
*On request switch on the frame	



miami - 55, 70, 80, 90









colorado

. 77

. 87



CODE	3419-77A-B2W 3419-77AS-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K A CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3419-87A-B4W 3419-87AS-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A) POLISHED (AS) FROSTED
LED COLOUR	3000K A CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx 
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	WIRE SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



colorado - 77, 87



colorado - 77S, 87S





FINISHES	20 ○
----------	---------



aspen

. 77

. 87



CODE	3418-77A-B2W 3418-77AS-B2W 3418-77C-B2W 3418-77CS-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A,C) POLISHED (AS,CS) FROSTED
LED COLOUR	3000K A,C CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3418-87A-B4W 3418-87AS-B4W 3418-87C-B4W 3418-87CS-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	(A,C) POLISHED (AS,CS) FROSTED
LED COLOUR	3000K A,C CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



aspen - 77, 87



aspen - 77S, 87S



FE

FINISHES

20









alabama

. 60

. 75

. 85

. 95



CODE	3422-60A-B1.5W 3422-60C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 88lm 1mt 33lx 2mt 8lx 3mt 4lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3422-75A-B2W 3422-75C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 191lm 1mt 70lx 2mt 17lx 3mt 8lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3422-85A-B4W 3422-85C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 323lm 1mt 123lx 2mt 30lx 3mt 14lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	

CODE	3422-95A-B6W 3422-95C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 356lm 1mt 136lx 2mt 34lx 3mt 15lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) WIRE SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - 3000K+RED
IP RATE	



alabama - 60, 75, 85, 95





Courtesy of Fairline Yachts Ltd
Custom version with logo, on
request



Courtesy Lights

Gamma di prodotti ideati per segnapasso, luci di cortesia, etc.
La collezione include anche piccoli "gioielli" per creare innumerevoli effetti luminosi.



*Range of products designed for path markers, courtesy lights, etc.
The collection also includes small "jewels" to create many lighting effects.*



dallas

1L . 40

2L . 40




CODE	3477-40U-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 4lm 1mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	


CODE	3477-40G-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 7lm 1mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	



dallas 1L . 40

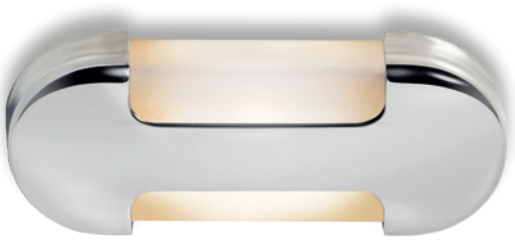


dallas 2L . 40

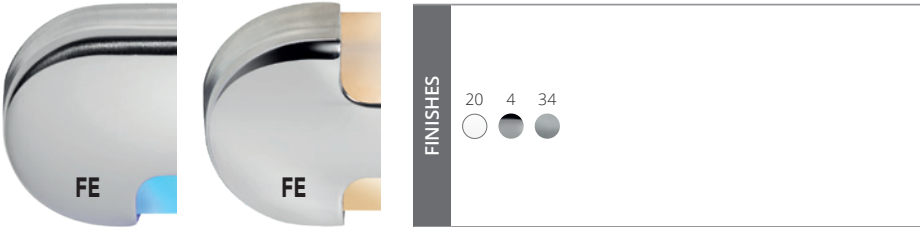




dallas

1L . 80



2L . 80



CODE	3536-80U-B1.5W
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 14lm 1mt 4lx 2mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	

* Possibility of installation
with opaline

CODE	3536-80G-B1.5W
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 30lm 1mt 8lx 2mt 2lx 3mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	

* Possibility of installation
with opaline



dallas 1L . 80




dallas 2L . 80 PLUS




bedford


. 40



CODE	3478-40-1LED
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 10lm 1mt 3lx 2mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	




bedford . 40

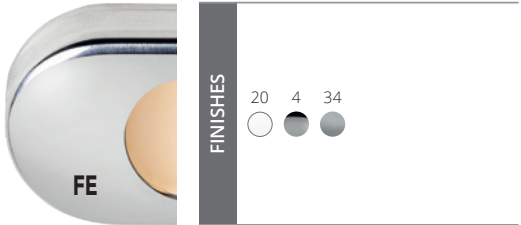





bedford

1 . 80



CODE	3537-80-B1.5W
FIXTURE	FIXED COURTESY LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 58lm 1mt 19lx 2mt 5lx 3mt 2lx
IP RATE	IP66
WEIGHT	
MATERIALS	STAINLESS STEEL AISI 316 AND POLYCARBONATE
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED - RGB
IP RATE	

** Possibility of installation
with opaline*

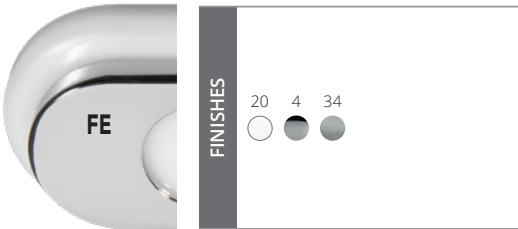


WITH BEHIND
OPALINE
SPACER

bedford . 80 PLUS



savannah

. 40



CODE	3432-40-B1.5W
FIXTURE	EYELID DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 11lm 1mt 4lx 2mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	



savannah



FINISHES	20 4 34





tampa



sarasota

. 40

. 40



CODE	3416-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	CLEAR
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 343lx 2mt 86lx 3mt 38lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	



tampa



sarasota







florida

1L . 40

2L . 40



CODE	3420-40G-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	
SCREEN	
LED COLOUR	3000K CRI >80 LMN 1lm
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3420-40U-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	
SCREEN	
LED COLOUR	3000K CRI >80 LMN 3lm
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	





florida 1L-2L



portland

1L . 40

2L . 40



CODE	3421-40G-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	
SCREEN	
LED COLOUR	3000K CRI >80 LMN 1lm
	IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	

CODE	3421-40U-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	
SCREEN	
LED COLOUR	3000K CRI >80 LMN 3lm
	IP66
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	BANDED SPRINGS OR SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE
IP RATE	





FE

FINISHES

20 4 34

○ ● ●



portland 1L-2L



columbia nevada

. 35

. 35



CODE	3452-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI <80 LMN 1lm
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	

CODE	3454-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	ASYMMETRICAL
SCREEN	OPAL
LED COLOUR	3000K CRI <80 LMN 1lm
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	



columbia



nevada



FINISHES






dana


baltimora

. 35



CODE	3453-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 3lm 1mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	

. 35




CODE	3455-35-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 3lm 1mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	



dana



baltimora

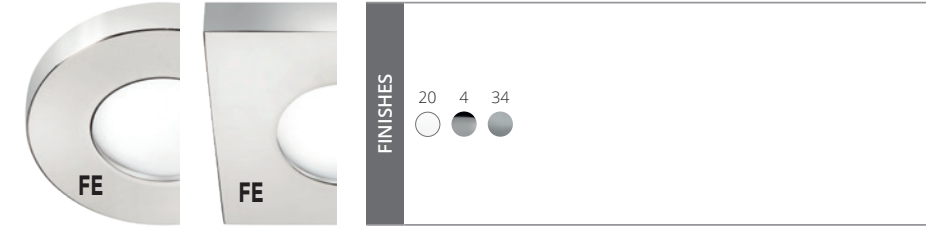





detroit

boston

. 20

. 20



CODE	3450-20-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	CLEAR
LED COLOUR	3000K CRI >80 LMN 8lm 1mt 3lx 2mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	PRESS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	


CODE	3451-20-1LED
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 0,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	CLEAR
LED COLOUR	3000K CRI >80 LMN 8lm 1mt 3lx 2mt 1lx
IP RATE	IP66
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	PRESS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED - BLUE - RGB
IP RATE	



detroit



boston

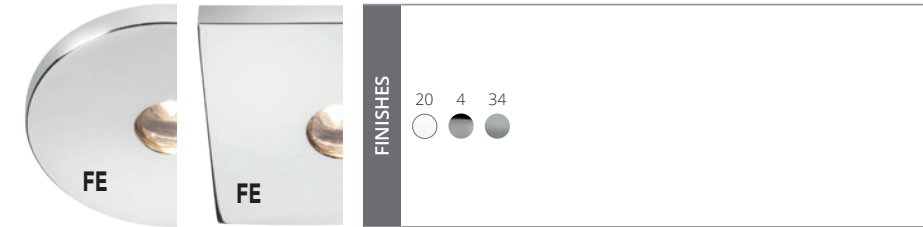




Reading Lights

Elementi luce flessibili e direzionabili, da parete o da tavolo, realizzati per la lettura o illuminazione puntuale.



*Flexible and adjustable lighting elements,
for wall or table, for reading or precise illumination.*



catalina




CODE	2182-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 343lx 2mt 86lx 3mt 38lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED
IP RATE	




catalina



ventura



CODE	2184-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 343lx 2mt 86lx 3mt 38lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED
IP RATE	



FINISHES


3

ventura







arizona



CODE	2185-I-Z1.5W
FIXTURE	WALL READING LIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	1 x MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	MEDIUM
SCREEN	
LED COLOUR	3000K CRI >80 LMN 96lm 1mt 343lx 2mt 86lx 3mt 38lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: BRASS
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - RED
IP RATE	




arizona






philly


. 45



CODE	2186-I-B3W
FIXTURE	READING ADJUSTABLE LIGHT
ADJUSTABILITY	YES
LIGHT SOURCE	LED
POWER	1 x MAX 3W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 142lm 1mt 52lx 2mt 13lx 3mt 6lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K - BLUE - RED
IP RATE	



philly



Wave Neonflex

Soluzione flessibile per illuminazione diffusa a LED che consente di creare disegni luminosi lineari e curvi su soffitti, pareti etc, in ambienti interni ed esterni.

Flexible solution for diffused LED lighting, it allows the creation of linear and curve lighting decorations on ceilings, walls. etc. for indoor and outdoor environment.



wave neonflex side



wave neonflex top




wave neonflex small



wave neonflex

• side

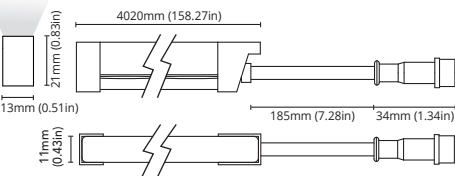

CODE

FIXTURE

ADJUSTABILITY

LIGHT SOURCE

POWER

SUPPLY

PROTECTION

DIMMABLE

BEAM

SCREEN

LED COLOUR

IP RATE

WEIGHT

MATERIALS

MOUNTING
SYSTEM

OPTIONAL

LED COLOUR

IP RATE

5403-1MT-10WM
5403-2MT-10WM
5403-3MT-10WM
5403-4MT-10WM

FLEXIBLE LED

NO

POWER LED

10W/MT

24 Vdc

PROTECTION POLARITY REVERSE

YES

WIDE

OPAL

3000K

CRI

>80

LMN

520lm/m

1mt


14lx

2mt

3lx

3mt

2lx



IP68

PU


NR.3 CLIPS AND NR.1 ENDCAP
FOR METER INCLUDED

2700K - 4000K - 6000K - RGB - RGBW

On request 12Vdc available.



• top

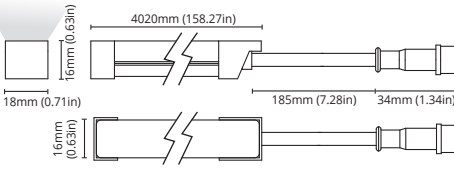

5401-1MT-10WM
5401-2MT-10WM
5401-3MT-10WM
5401-4MT-10WM

FLEXIBLE LED

NO

POWER LED

10W/MT

24 Vdc

PROTECTION POLARITY REVERSE

YES

WIDE

OPAL

3000K

CRI

>80

LMN

820lm/m

1mt


21lx

2mt

5lx

3mt

2lx



IP68

PU

NR.3 CLIPS AND NR.1 ENDCAP
FOR METER INCLUDED

2700K - 4000K - 6000K - RGB - RGBW


On request 12Vdc available.






wave neonflex


• small

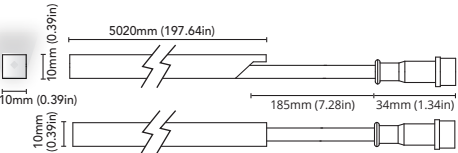

CODE	5404-1MT-10WM 5404-2MT-10WM 5404-3MT-10WM 5404-4MT-10WM 5404-5MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 690lm/m 1mt 11lx 2mt 3lx 3mt 1lx
IP RATE	IP68
WEIGHT	
MATERIALS	PU
MOUNTING SYSTEM	NR.3 CLIPS AND NR.1 ENDCAP FOR METER INCLUDED
OPTIONAL LED COLOUR	2700K - 4000K - 6000K - RGB - RGBW
IP RATE	




On request 12Vdc available.






wave neonflex

double bending

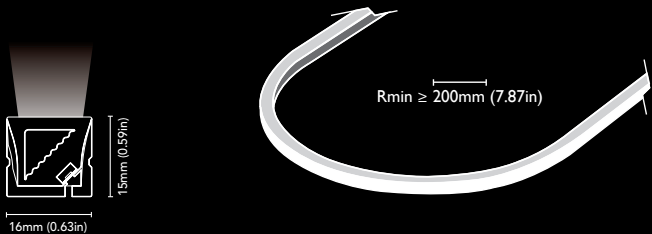


CODE	5408-1MT-10WM 5408-2MT-10WM 5408-3MT-10WM 5408-4MT-10WM 5408-5MT-10WM
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 10W/M
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	MILKY
LED COLOUR	3000K CRI >80 LMN 430lm/m 1mt 11lx 2mt 3lx 3mt 1lx
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL	
LED COLOUR	2700K, 4000K, 6000K






wave neonflex


• mini side

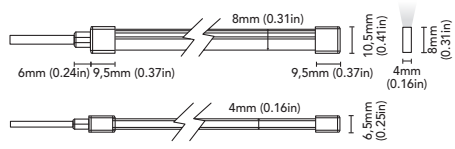


CODE	5407-1MT-6WM - 5407-2MT-6WM 5407-3MT-6WM - 5407-4MT-6WM 5407-5MT-6WM
FIXTURE	FLEXIBLE LED LIGHTING SOLUTION
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	6W/MT
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	MILKY
LED COLOUR	3000K CRI >80 LMN 253lm/m 1mt 7lx 2mt 2lx 3mt 1lx
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL LED COLOUR	2700K - 4000K - 6000K
IP RATE	

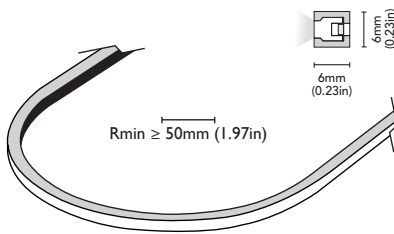

• mini top

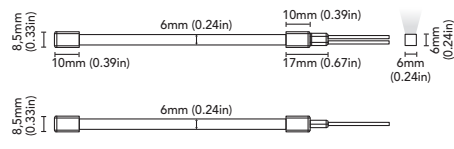








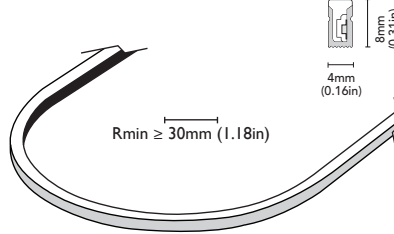








CODE	5406-1MT-6WM - 5406-2MT-6WM 5406-3MT-6WM - 5406-4MT-6WM 5406-5MT-6WM
FIXTURE	FLEXIBLE LED LIGHTING SOLUTION
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	6W/MT
SUPPLY	24 Vdc
PROTECTION	
DIMMABLE	YES
BEAM	WIDE
SCREEN	MILKY
LED COLOUR	3000K CRI >80 LMN 345lm/m 1mt 9lx 2mt 2lx 3mt 1lx
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL LED COLOUR	2700K - 4000K - 6000K
IP RATE	



mini side

mini top

accessories wave neonflex


	 19mm (0.75in) 21.5mm (0.85in)	 14mm (0.55in) 26.4mm (1.04in)	 11.5mm (0.45in) 12.5mm (0.49in)	 12.7mm (0.50in) 13mm (0.51in)	 8.50mm (0.33in) 6mm (0.24in)	 6.35mm (0.25in) 7mm (0.27in)
CODE	5401-PRO5	5403-PRO6	5404-PRO4	5404-PRO11	5406-PRO9	5407-PRO10
	X ART. 5401-4MT-10WM	X ART. 5403-4MT-10WM	X ART. 5404-5MT-10WM	X ART. 5404-5MT-10WM	X ART. 5406-5MT-10WM	X ART. 5407-5MT-10WM
	POLYCARBONATE PROFILE	ALUMINUM PROFILE	ALUMINUM PROFILE	PLASTIC PROFILE	ALUMINUM PROFILE	ALUMINUM PROFILE
ACCESSORIES						
	 17mm (0.67in) 21.4mm (0.84in)	5401-SPR, 5403-SPR, 5404-SPR 5406-SPR, 5407-SPR, 5408-SPR	5401-PEC, 5403-PEC, 5404-PEC 5406-PEC, 5407-PEC, 5408-PEC			
	X ART. 5408-5MT-10WM					
	ALUMINUM PROFILE	CLIPS STAINLESS STEEL	PLASTIC ENDCAP			
						

Tagli di luce per ogni soluzione d'illuminazione,
impiegabili con strip led di diverse potenze.

*Linear profiles for every lighting solutions,
to combine with led strips of different power.*



mini blade

one . A




CODE	5070-P06
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS



ON REQUEST BLACK BODY WITH
SMOKED SCREEN VERSION

ACCESSORIES	
PLASTIC END CAPS 2X	5070-PEC06 
BAND CLIP	5070-MC06 


two . B




CODE	5070-P07
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS


ACCESSORIES	
PLASTIC END CAPS 2X	5070-PEC07 
BAND CLIP	5070-MC07 

three . C



CODE	5070-P08
FIXTURE	
BEAM	
SCREEN	OPAL
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS


ACCESSORIES	
PLASTIC END CAPS 2X	5070-MEC08 
BAND CLIP	

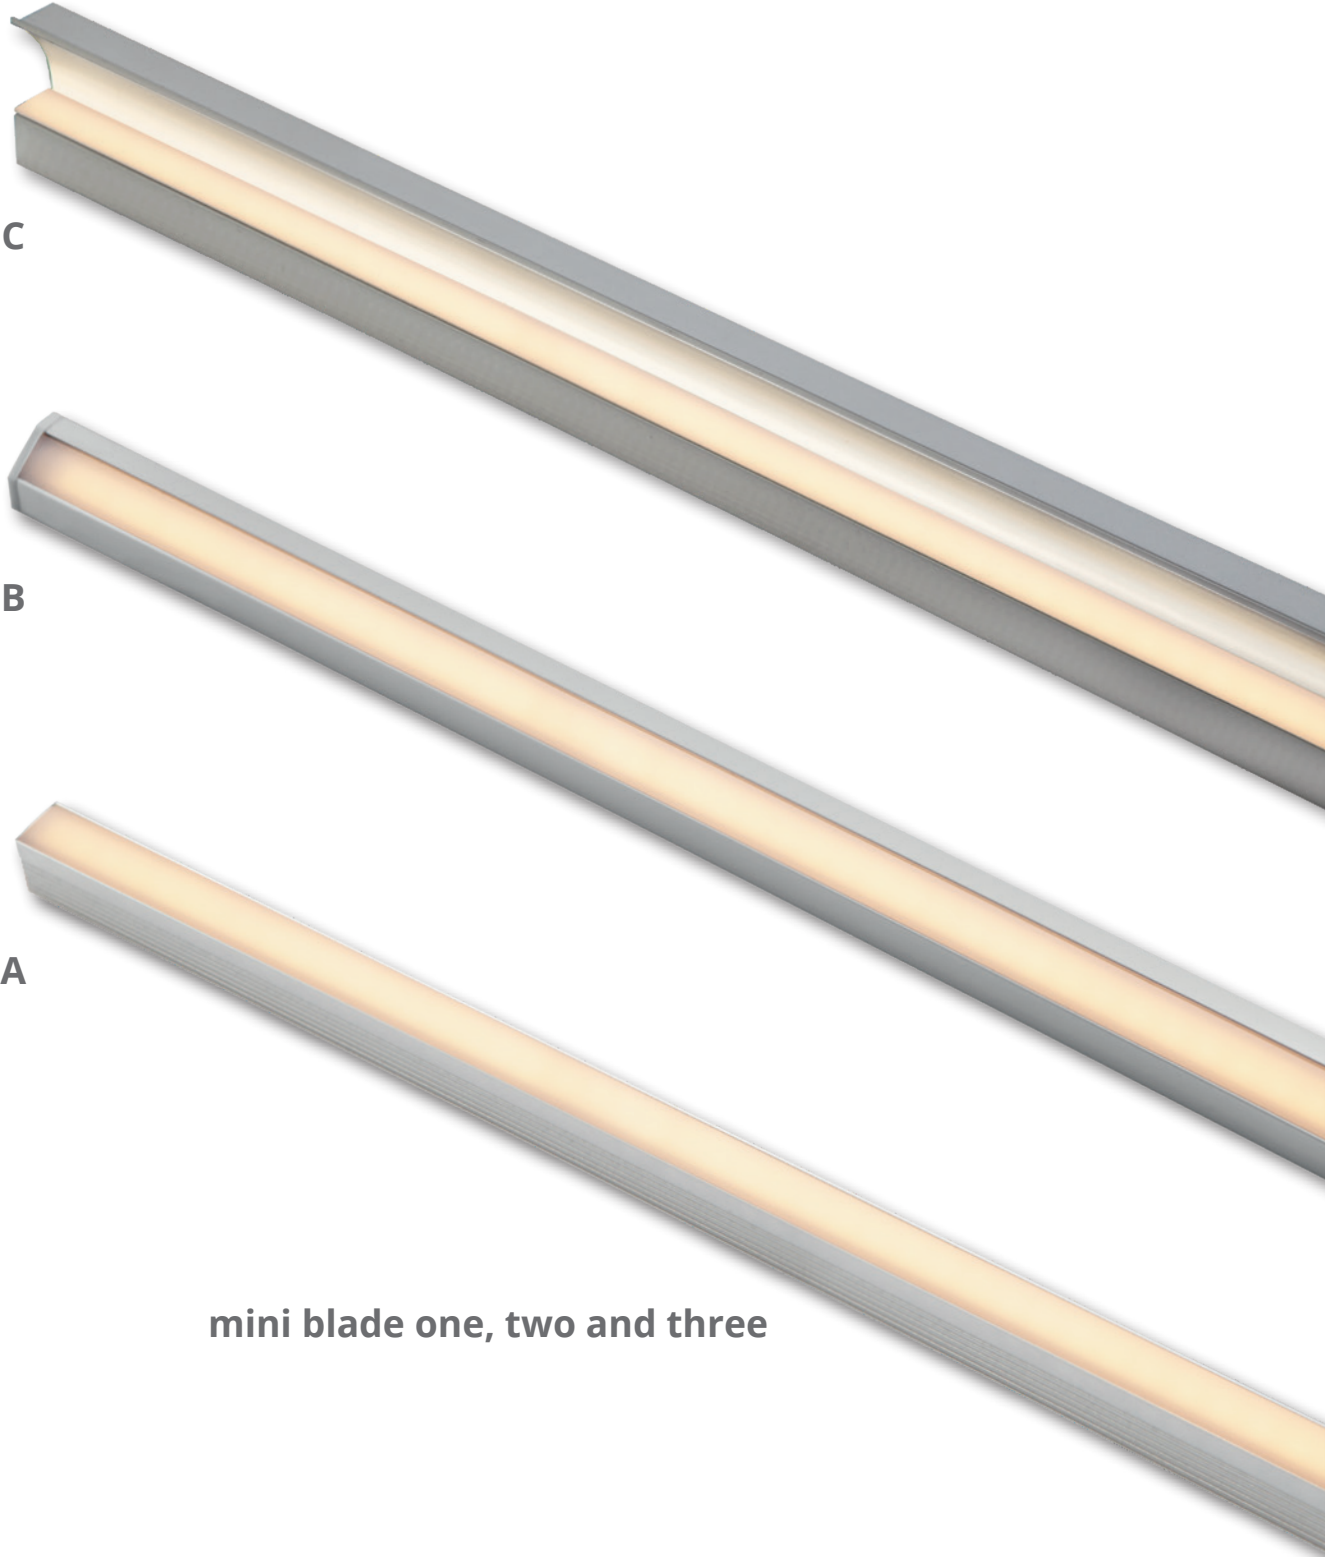


mini blade one, two and three

blade one


one . A


















one . B



one . C




CODE	5070-P18	5070-P46	5070-P48
FIXTURE			
BEAM			
SCREEN	OPAL	OPAL	OPAL
LED COLOUR			
IP RATE			
MATERIALS	BODY: ALUMINIUM	BODY: ALUMINIUM	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS	SCREWS	SCREWS
ACCESSORIES			
CAPS 2X	5070-MEC18 	5070-MEC46 	5070-MEC48 
T CONNECTION	5070-C18T 	5070-C46T 	5070-C48T 
L CONNECTION	5070-C18L 	5070-C46L 	5070-C48L 
X CONNECTION	5070-C18X 	5070-C46X 	5070-C48X 
BAND CLIP	5070-SPR18 	5070-SPR46 	5070-SPR48 

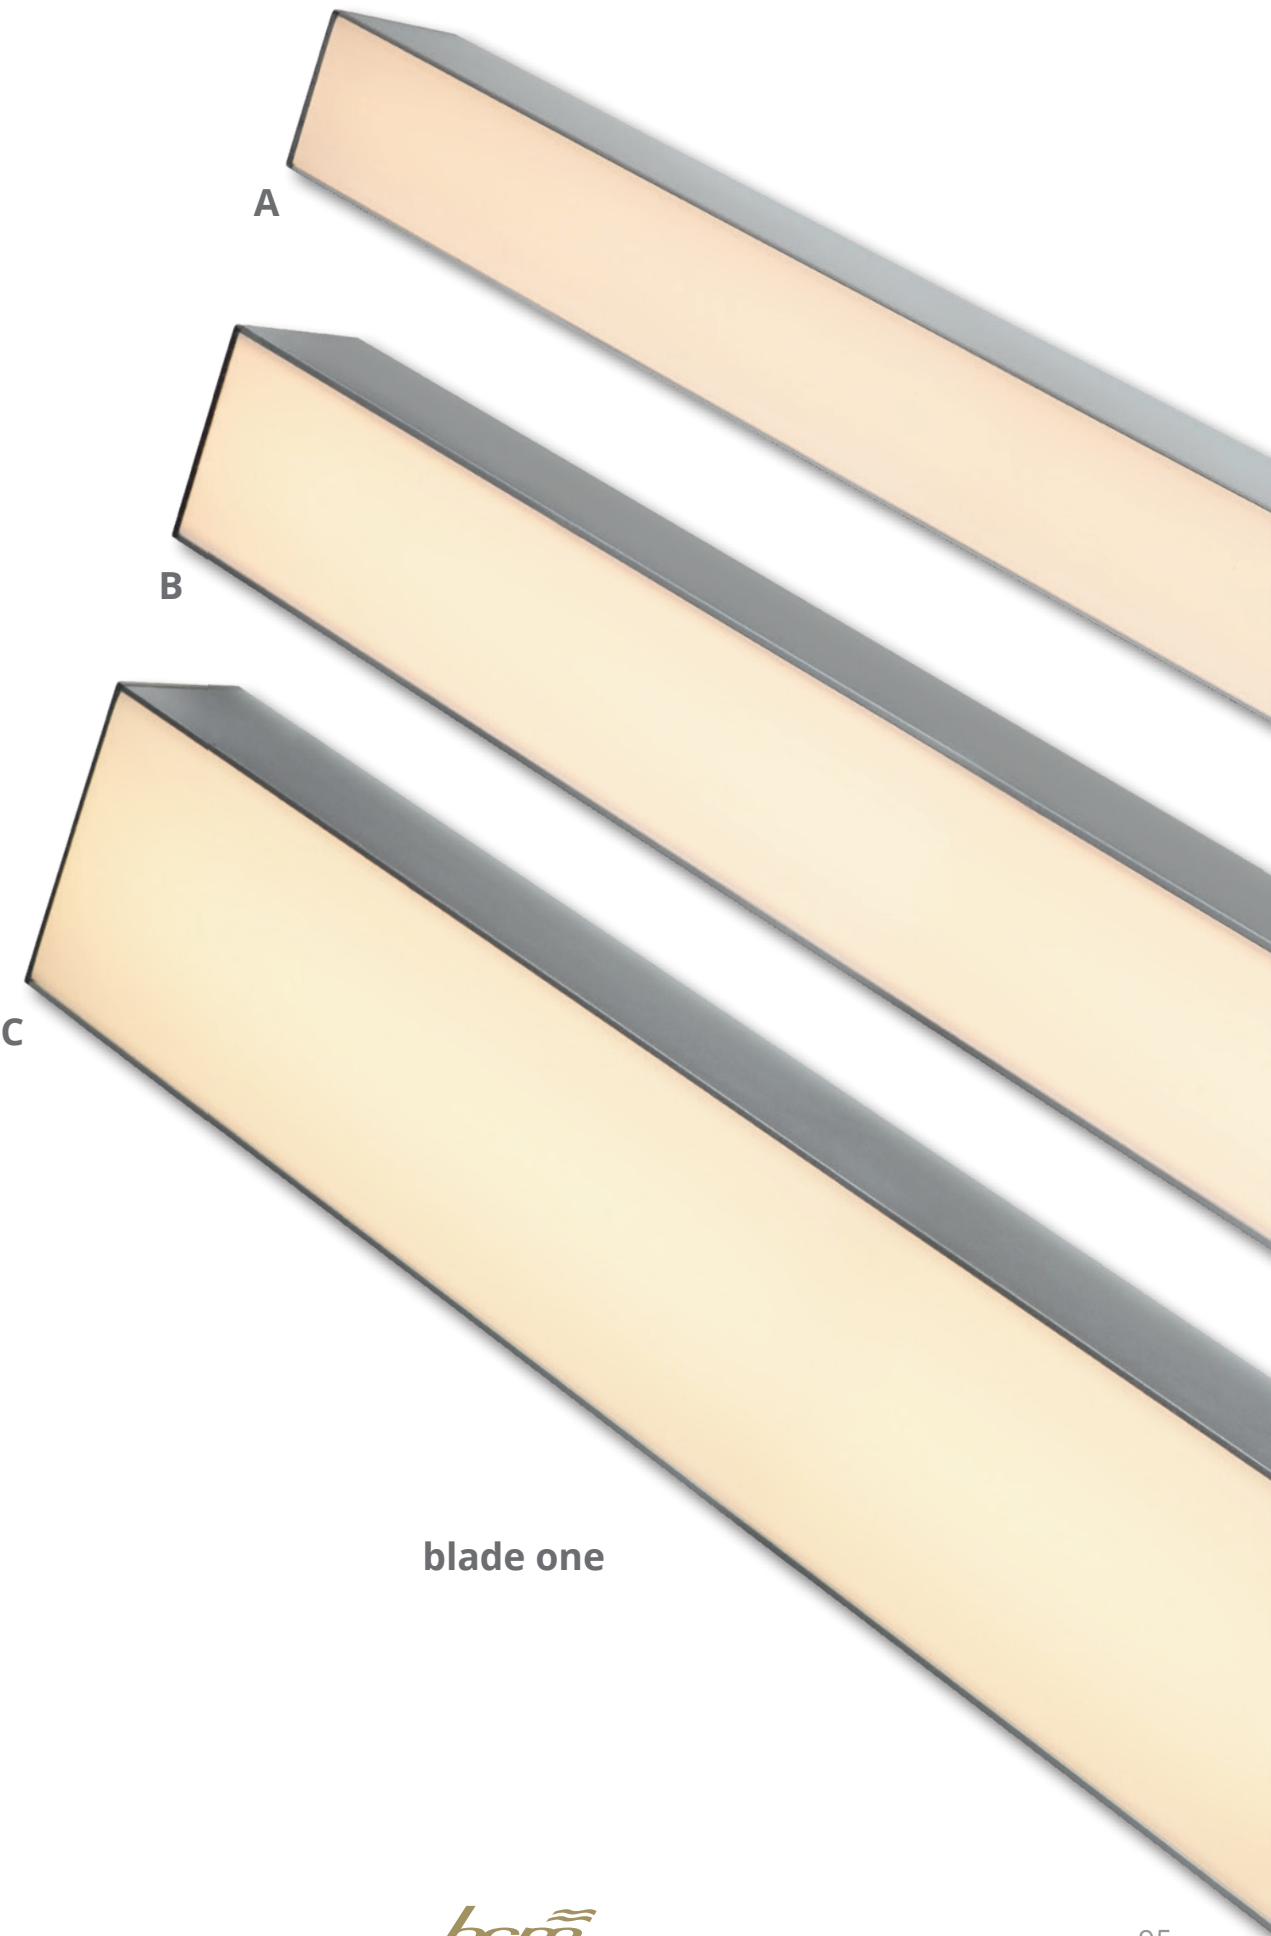


blade one

blade two


two . A



two . B



two . C



CODE	5070-P17	5070-P45	5070-P47
FIXTURE			
BEAM			
SCREEN	OPAL	OPAL	OPAL
LED COLOUR			
IP RATE			
MATERIALS	BODY: ALUMINIUM	BODY: ALUMINIUM	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS	SCREWS	SCREWS
ACCESSORIES			
CAPS 2X	5070-MEC17 	5070-MEC45 	5070-MEC47 
T CONNECTION	5070-C17T 	5070-C45T 	5070-C47T 
L CONNECTION	5070-C17L 	5070-C45L 	5070-C47L 
X CONNECTION	5070-C17X 	5070-C45X 	5070-C47X 
FIXING BRIDGE	5070-MCB17 	5070-MCB45 	5070-MCB47 
SPRINGS	5070-SPR17 	5070-SPR45 	5070-SPR47 

A


B

C

blade two

blade three

three . A




CODE	5070-P02
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ON REQUEST BLACK BODY WITH SMOKED SCREEN VERSION

ACCESSORIES

CAPS 2X	5070-PEC02	
PLASTIC CLIP	5070-PC02	
METAL CLIP	5070-MC02	

three . B




CODE	5070-P04
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ON REQUEST BLACK BODY WITH SMOKED SCREEN VERSION

ACCESSORIES

CAPS 2X	5070-PEC04	
PLASTIC CLIP	5070-PC04	
METAL CLIP	5070-MC04	

three . C




CODE	5070-P05
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS

ON REQUEST BLACK BODY WITH SMOKED SCREEN VERSION

ACCESSORIES


CAPS 2X	5070-PEC05	
PLASTIC CLIP	5070-PC05	
METAL CLIP	5070-MC05	

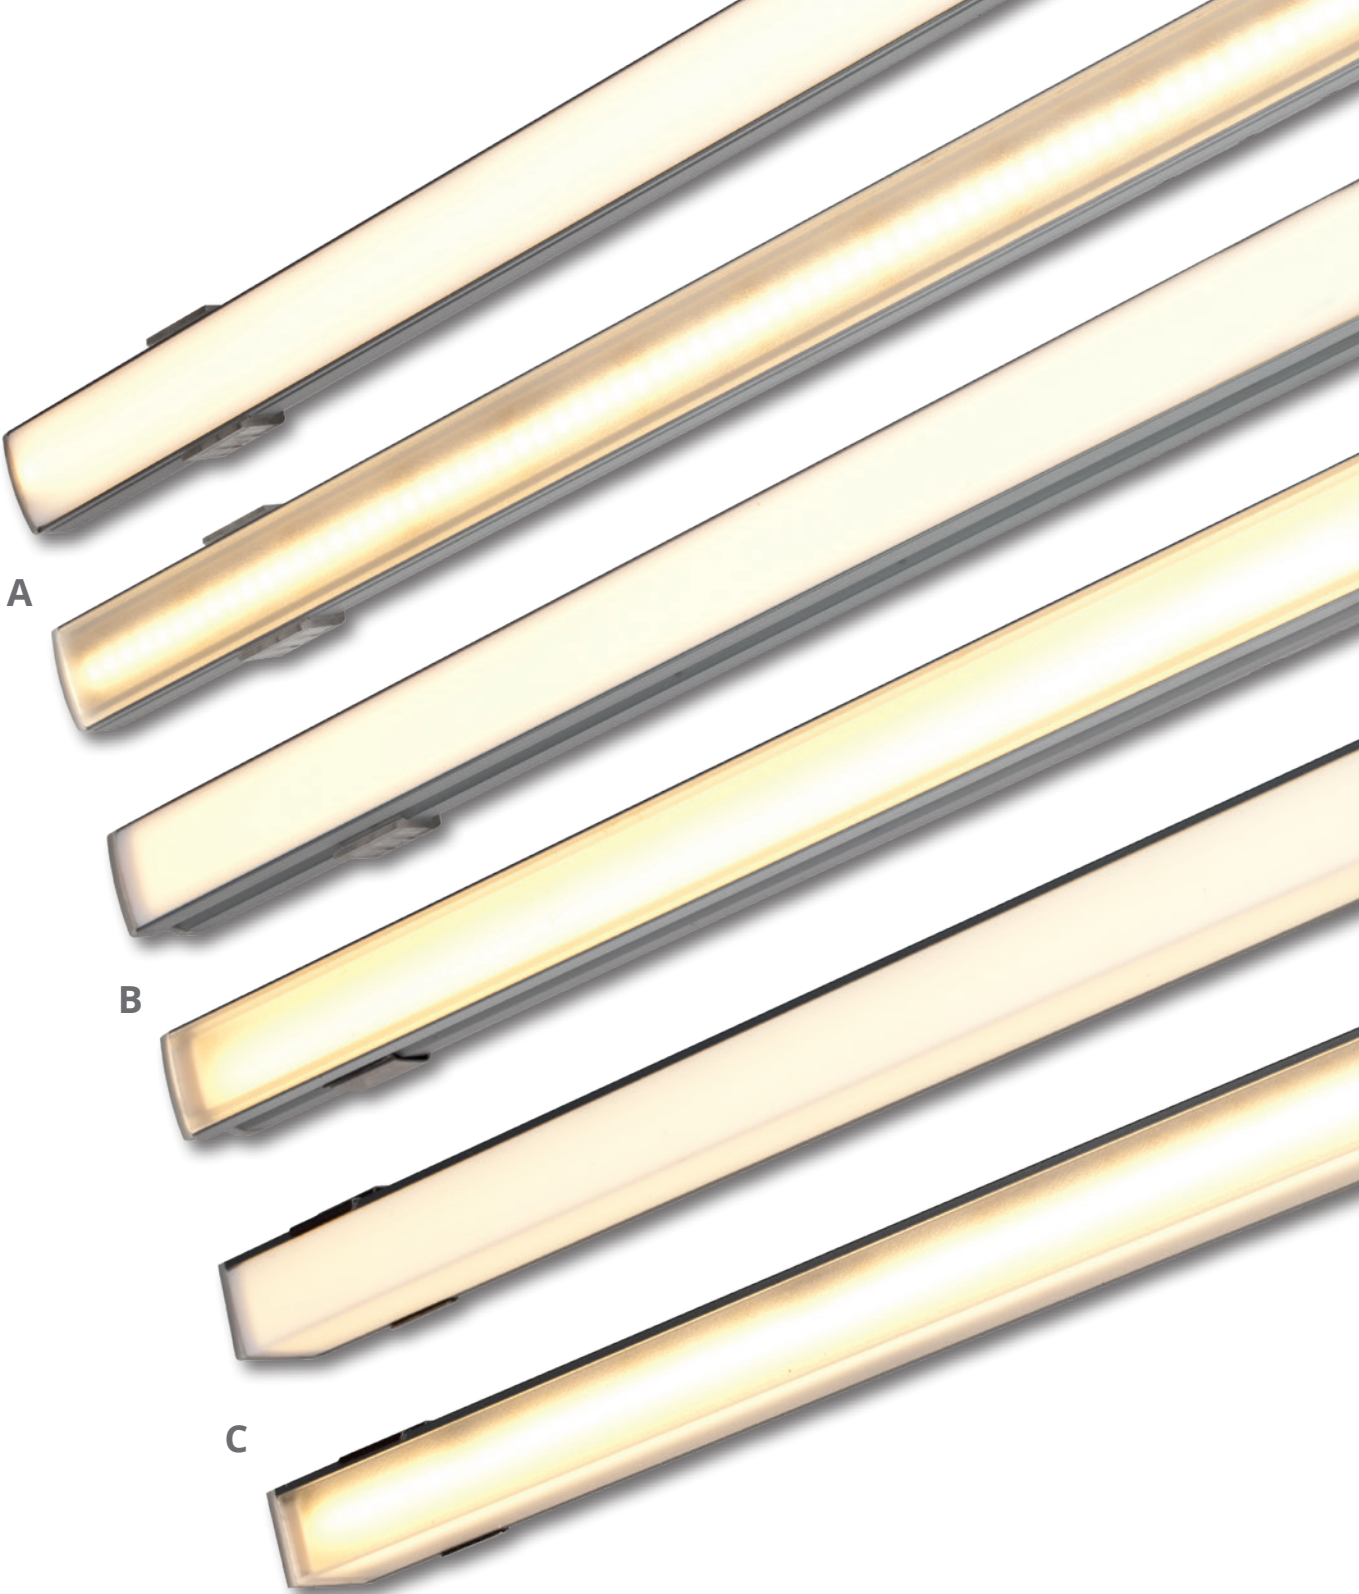

blade three


blade four

four . A




CODE	5070-P01
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC01


four . B





CODE	5070-P03
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC03

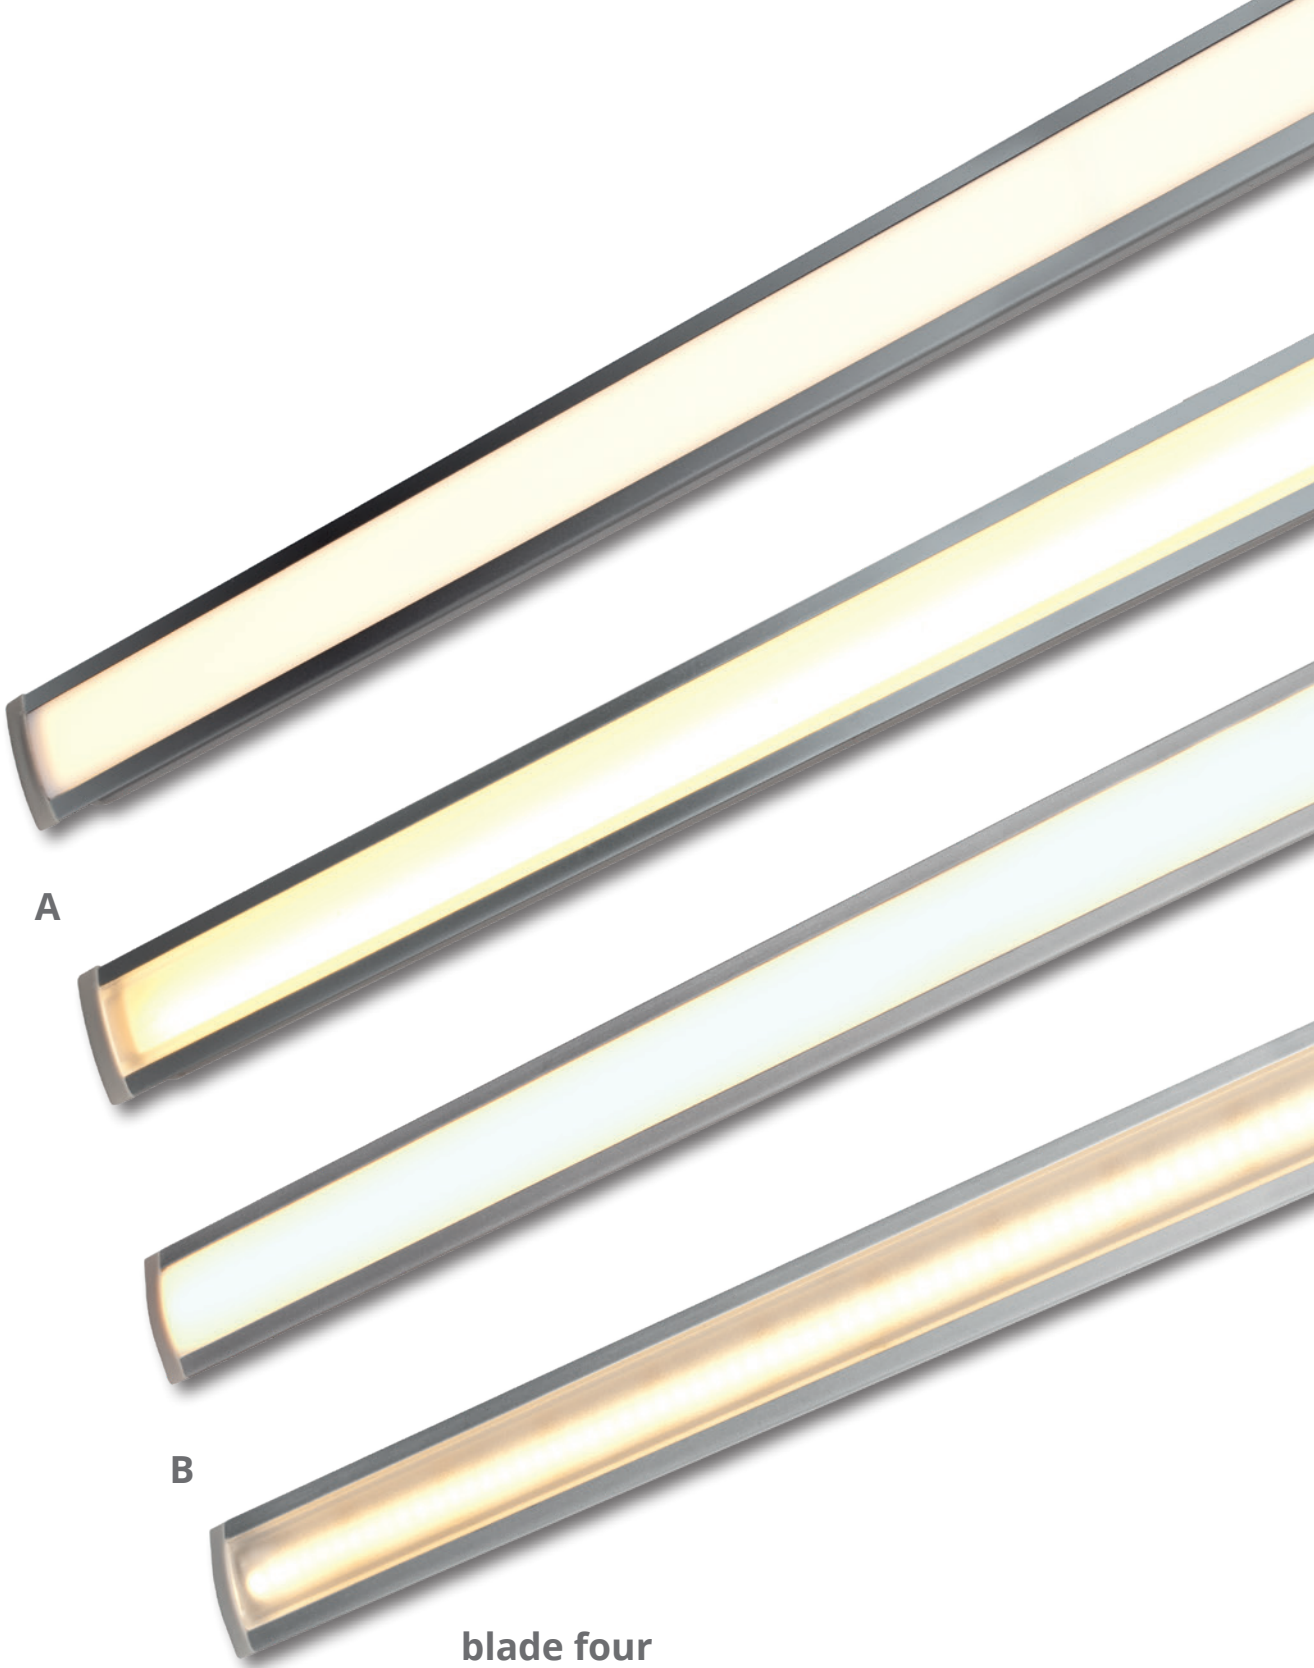

blade five



CODE	5070 -P23
FIXTURE	
BEAM	
SCREEN	OPAL, FROSTED
LED COLOUR	
IP RATE	
MATERIALS	BODY: ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC23 

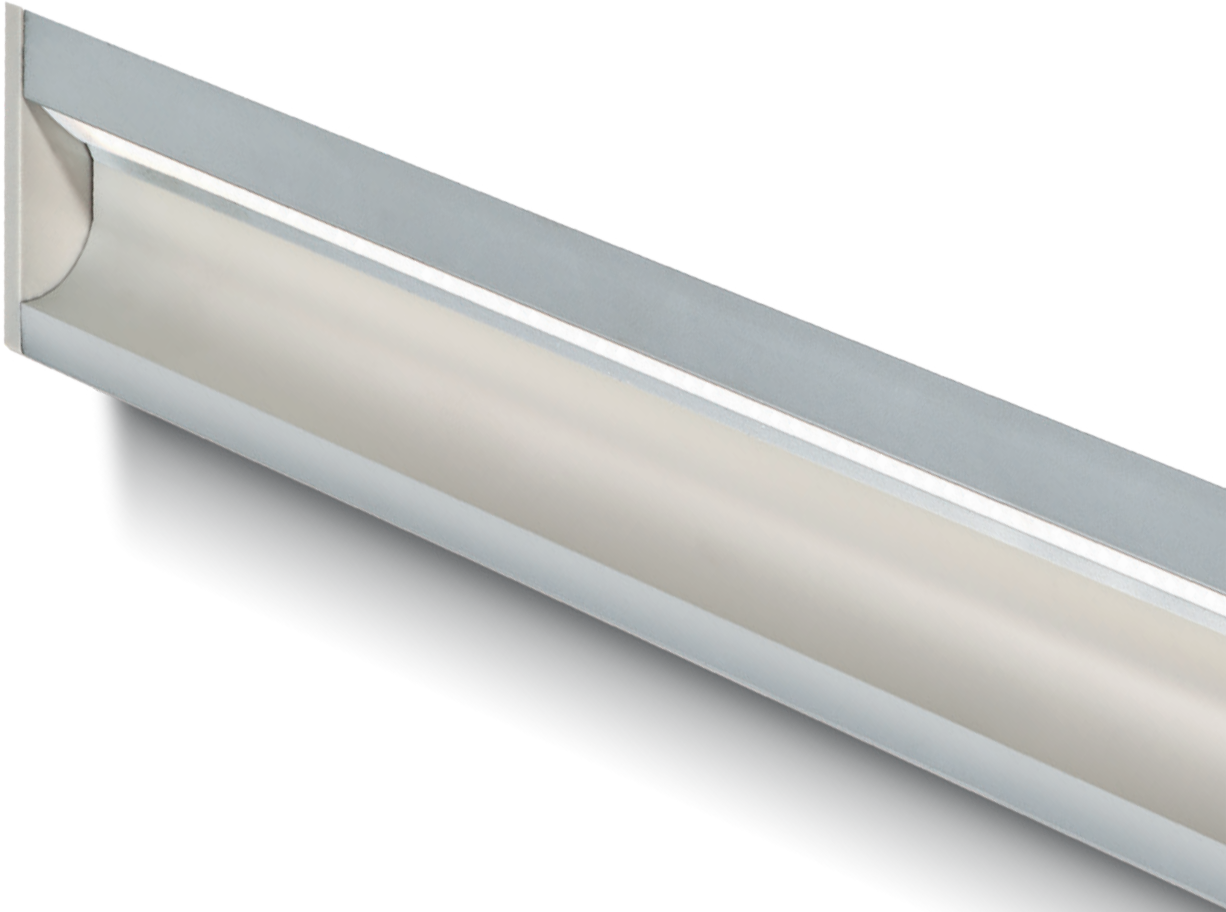


blade five




mini flex led one

- 240-TOP




CODE	5337-240NV-10WM	
FIXTURE	SLIM FLEX LED	
ADJUSTABILITY	NO	
LIGHT SOURCE	POWER LED	
POWER	240LED/MT - 10W/MT	
SUPPLY	24 Vdc	
PROTECTION		
DIMMABLE	YES	
BEAM	WIDE	
SCREEN	OPAL	
LED COLOUR	3000K	
	CRI	>90
	LMN	700lm/m
IP RATE		
WEIGHT		
MOUNTING SYSTEM		
MATERIALS		
OPTIONAL		
LED COLOUR	2700K - 4000K	
IP RATE		

- 240IP-TOP




5337-240NVP-10WM	
SLIM FLEX LED	
NO	
POWER LED	
240LED/MT - 10W/MT	
24 Vdc	
YES	
WIDE	
OPAL	
3000K	
CRI	>90
LMN	700lm/m
IP65	
2700K - 4000K	

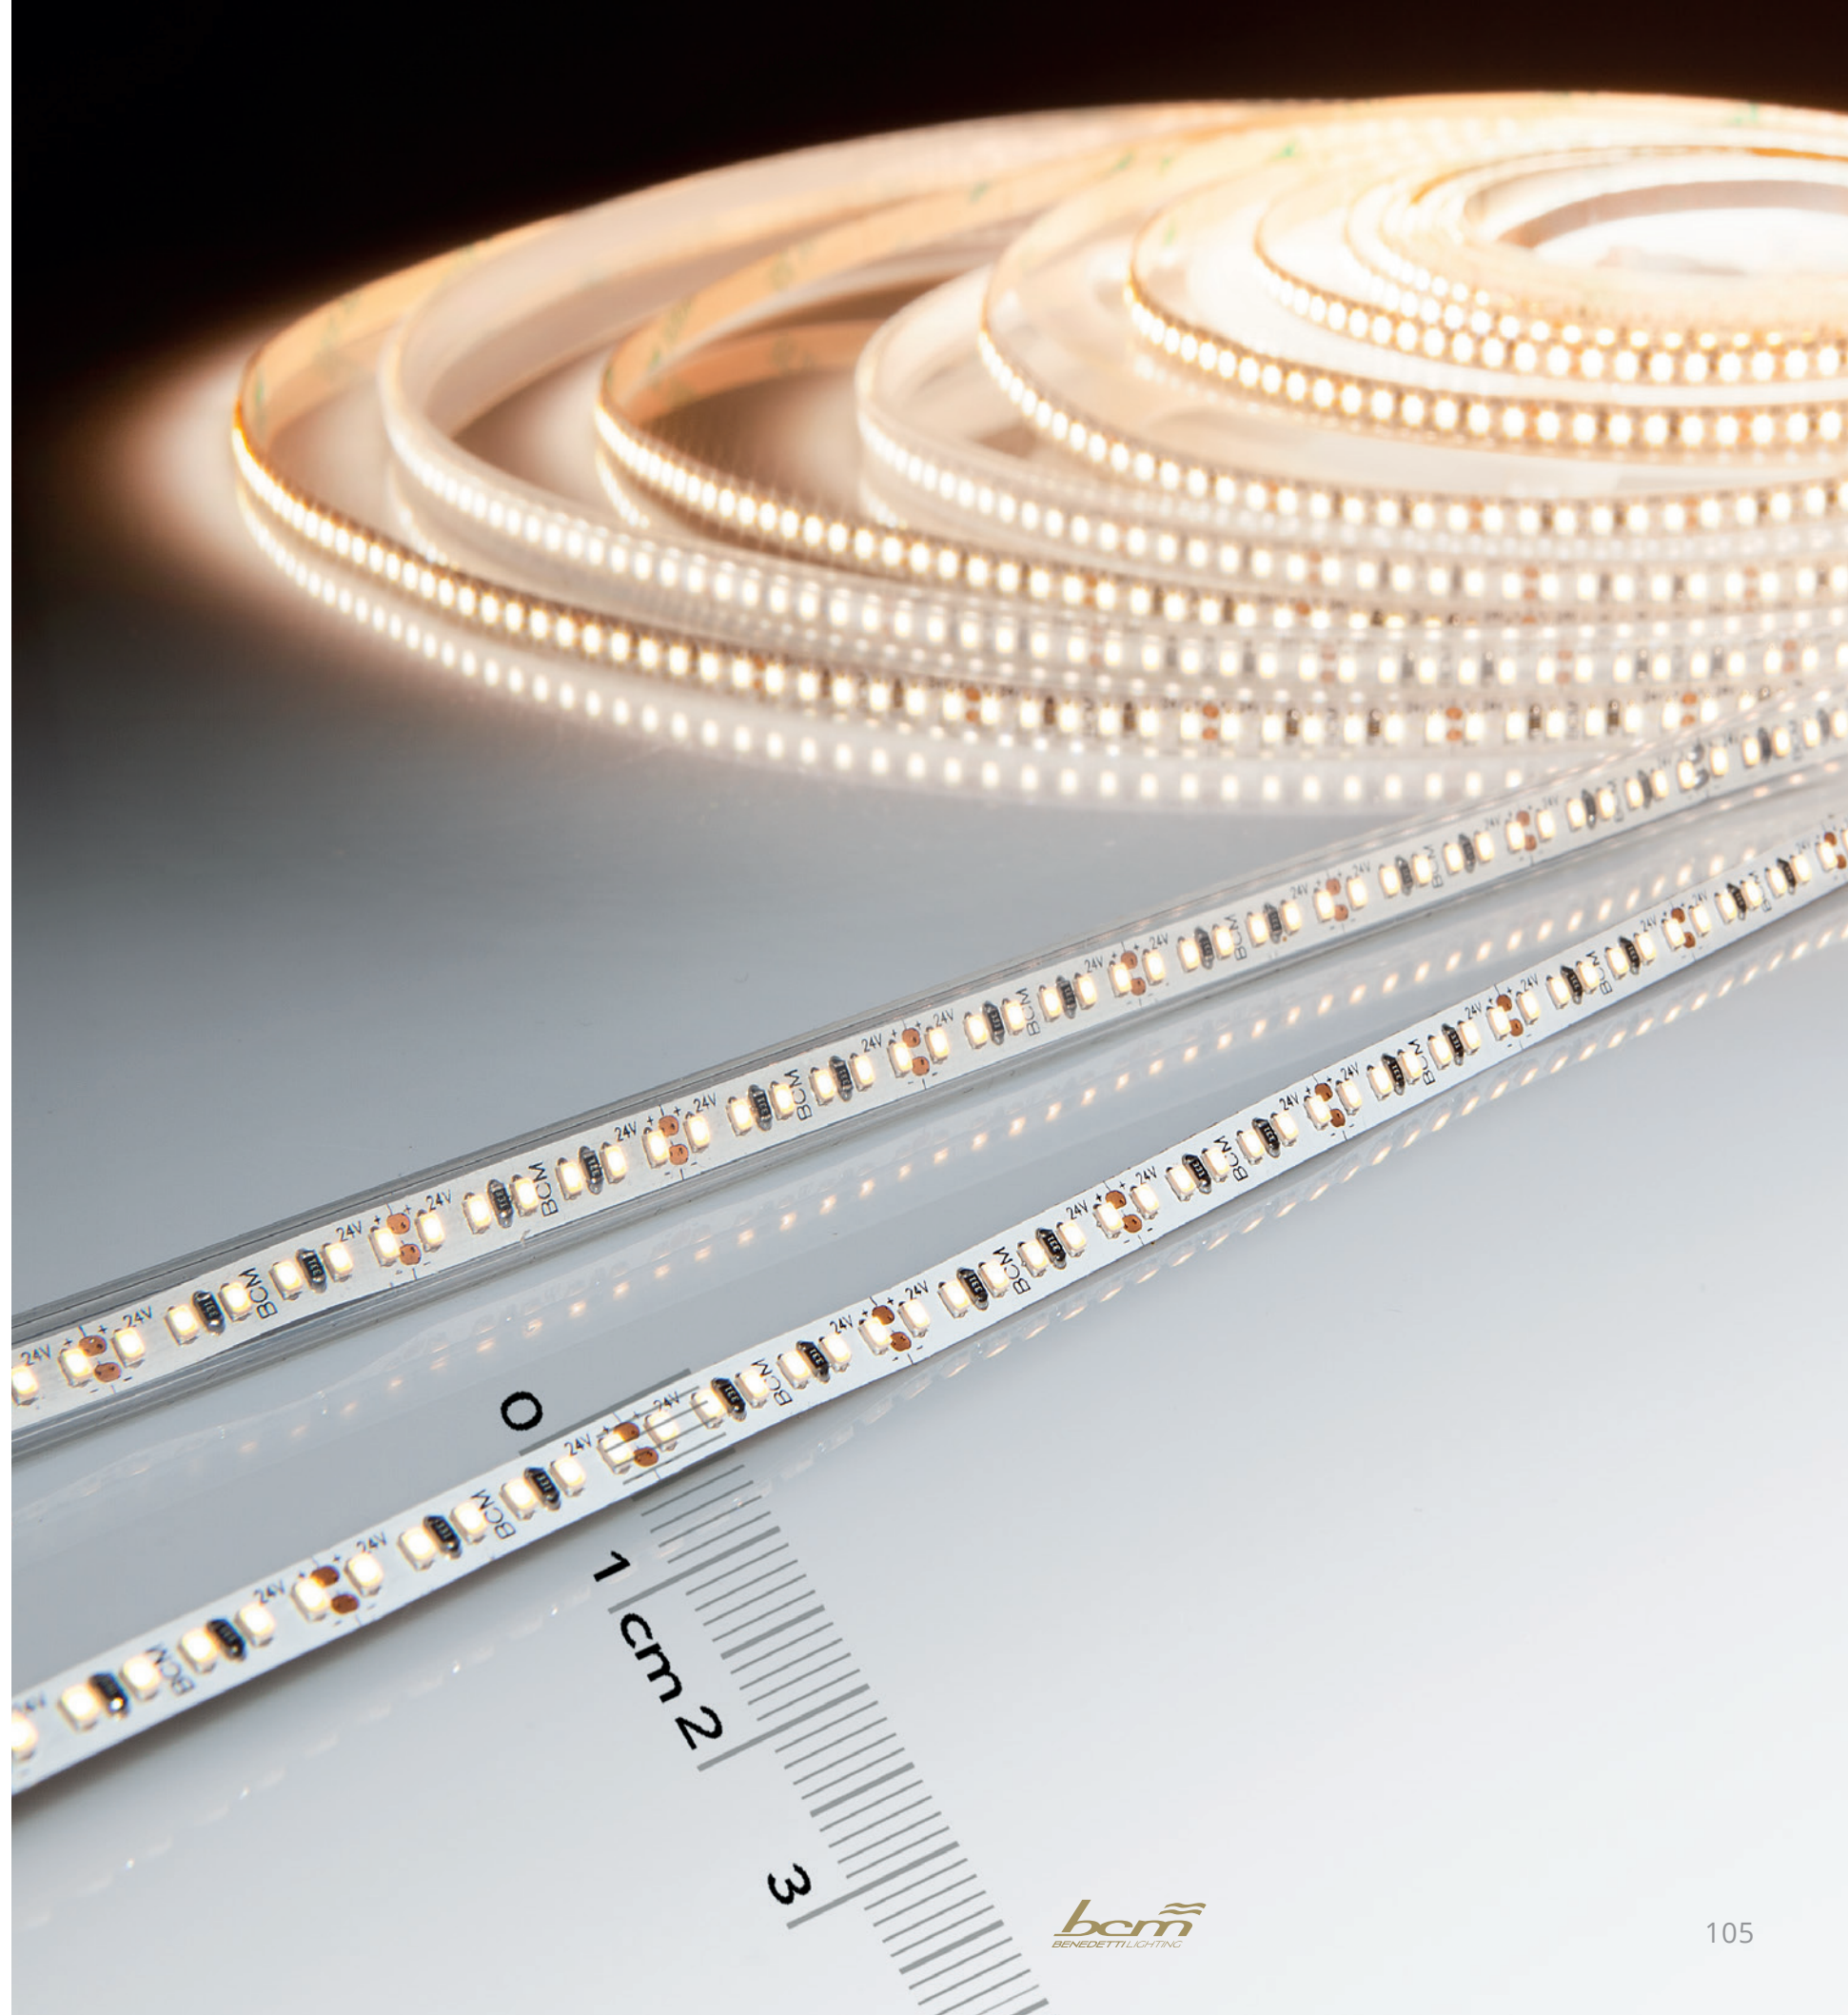




flex led two

. 60




CODE	5338-60MC-5WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	60LED/MT - 5W/MT
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 340lm/m
IP RATE	IP20
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL	
LED COLOUR	2700K
IP RATE	




CODE	5338-60MCP-5WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	60LED/MT - 5W/MT
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 340lm/m
IP RATE	IP67
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL	
LED COLOUR	2700K
IP RATE	

. 120




CODE	5338-120MC-10WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	120LED/MT - 10W/MT
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 700lm/m
IP RATE	IP20
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL	
LED COLOUR	2700K
IP RATE	



CODE	5338-120MCP-10WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	120LED/MT - 10W/MT
SUPPLY	16-32 Vdc - Driver on board
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 700lm/m
IP RATE	IP67
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL	
LED COLOUR	2700K
IP RATE	


. 240



CODE	5337-240MV-20WM
FIXTURE	FLEX LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	240LED/MT - 20W/MT
SUPPLY	24 Vdc
PROTECTION	POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	OPAL
LED COLOUR	3000K CRI >80 LMN 1600lm/m
IP RATE	IP20
WEIGHT	
MATERIALS	
MOUNTING SYSTEM	
OPTIONAL	
LED COLOUR	2700K
IP RATE	

* For proper use, install this strip on heatsink.



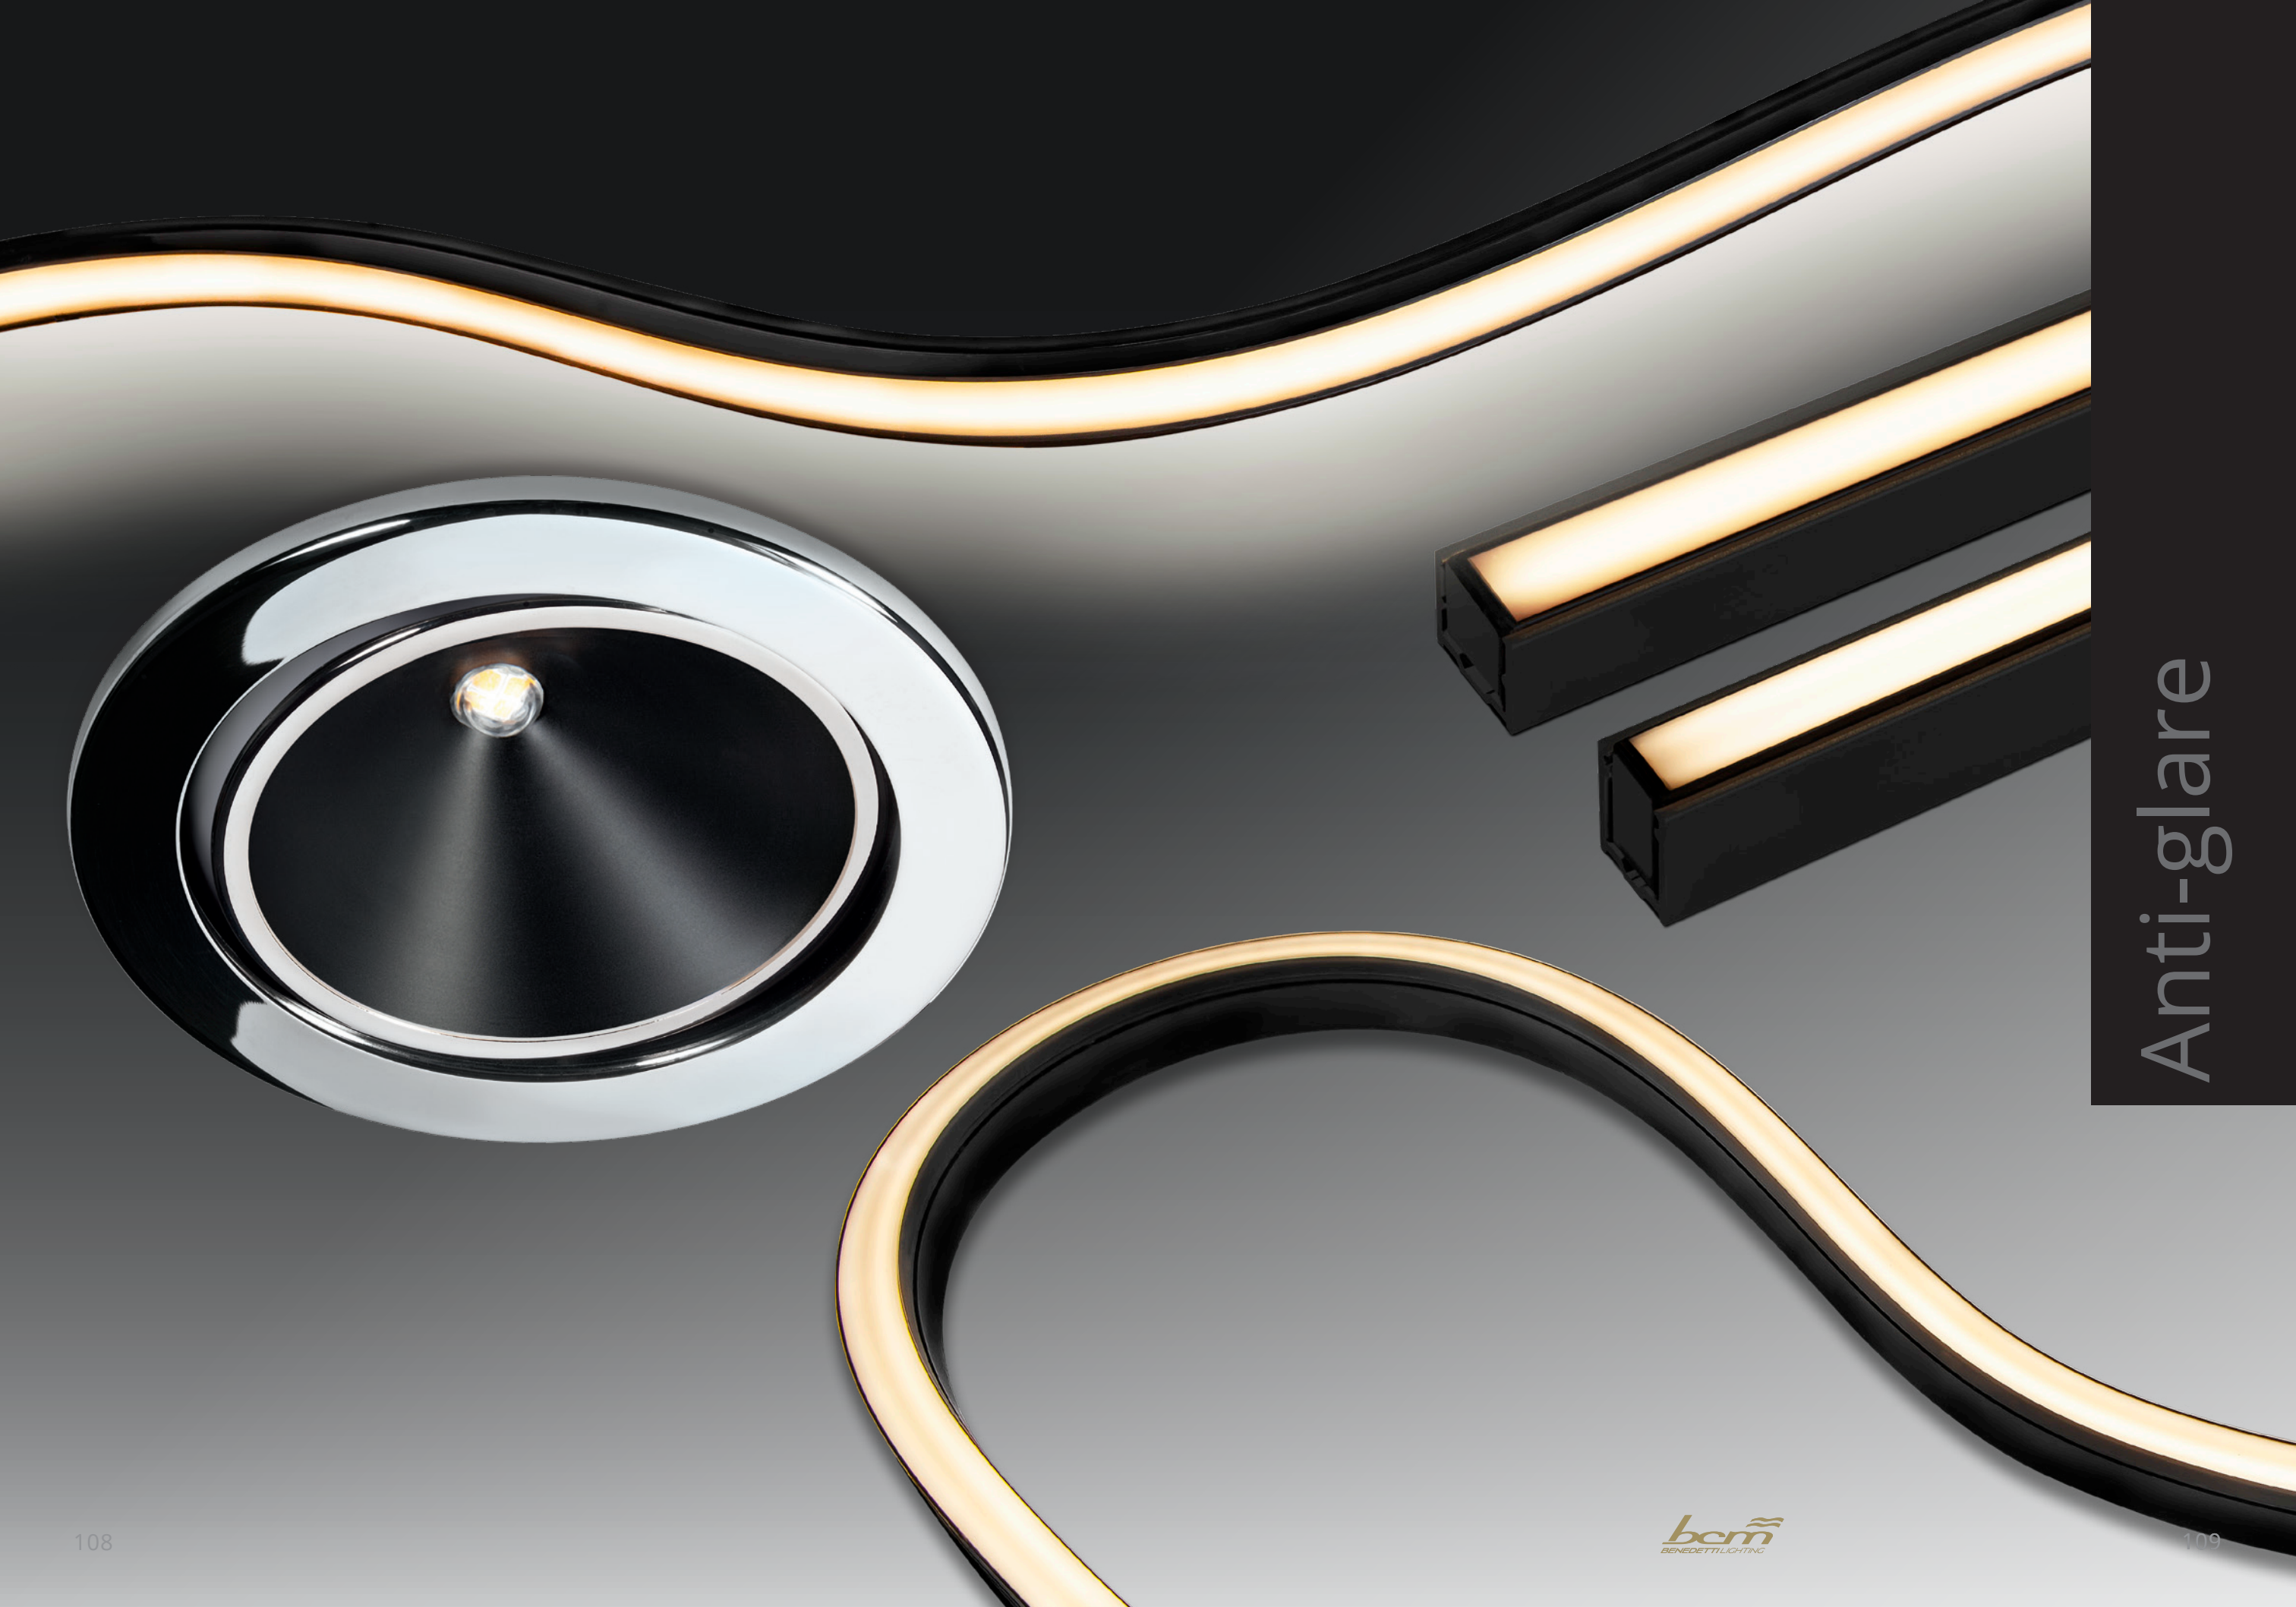



Anti-glare




malibù ag


. 60




CODE	3521-60A-B1.5W	
FIXTURE	FIXED DOWNLIGHT	
ADJUSTABILITY	NO	
LIGHT SOURCE	POWER LED	
POWER	MAX 1,5W	
SUPPLY	8-32 Vdc - Driver on board	
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	
DIMMABLE	YES	
BEAM	WIDE	
SCREEN	LENS	
LED COLOUR	<div><div><div>3000K</div><div>CRI >80</div><div>LMN 77lm</div><div>1mt 46lx</div><div>2mt 11lx</div><div>3mt 5lx</div></div><div></div></div>	
IP RATE	IP40	
WEIGHT		
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
MOUNTING SYSTEM	SPRINGS	
OPTIONAL		
LED COLOUR	2700K - 4000K	
IP RATE	IP65	


. 75




3521-75A-B2W	
FIXED DOWNLIGHT	
NO	
POWER LED	
MAX 2W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
LENS	
3000K	
CRI >80	
LMN 184lm	
1mt 59lx	
2mt 15lx	
3mt 7lx	
IP40	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
SPRINGS	
2700K - 4000K	
IP65	

. 85



3521-85A-B4W	
FIXED DOWNLIGHT	
NO	
POWER LED	
MAX 4W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
LENS	
3000K	
CRI >80	
LMN 230lm	
1mt 99lx	
2mt 25lx	
3mt 11 lx	
IP40	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
SPRINGS	
2700K - 4000K	
IP65	

. 95



3521-95A-B6W	
FIXED DOWNLIGHT	
NO	
POWER LED	
MAX 6W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
LENS	
3000K	
CRI >80	
LMN 254lm	
1mt 132lx	
2mt 33lx	
3mt 15lx	
IP40	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
SPRINGS	
2700K - 4000K	
IP65	



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

malibù ag . 85







newport ag

. 85

. 95



CODE	3525-85A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65

CODE	3525-95A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

newport ag . 85



FINISHES	20 4 34







orlando ag

. 60

. 75

. 85

. 95



CODE	3520-60A-B1.5W 3520-60C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1.5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 77lm 1mt 46lx 2mt 11lx 3mt 5lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65

CODE	3520-75A-B2W 3520-75C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame


CODE	3520-85A-B4W 3520-85C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame

CODE	3520-95A-B6W 3520-95C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 254lm 1mt 132lx 2mt 33lx 3mt 15lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

orlando ag . 60

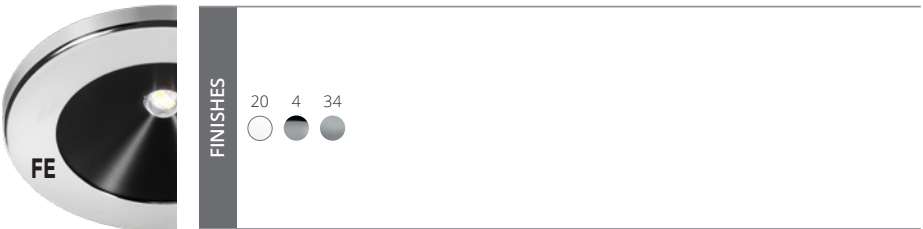

*switch









phoenix ag

. 85

. 95



CODE	3524-85A-B2W 3524-85C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx 
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame

CODE	3524-95A-B4W 3524-95C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx 
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65
	*On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

phoenix ag . 95



*switch









seattle ag

. 55


. 70

. 80


. 90




CODE	3523-55A-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 77lm 1mt 46lx 2mt 11lx 3mt 5lx IP40
IP RATE	
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65




CODE	3523-70A-B2W
FIXED DOWNLIGHT	
ADJUSTABILITY	NO
POWER LED	
MAX 2W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
LENS	
3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx IP40	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
SPRINGS	
2700K - 4000K	
IP65	



CODE	3523-80A-B4W
FIXED DOWNLIGHT	
ADJUSTABILITY	NO
POWER LED	
MAX 4W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
LENS	
3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx IP40	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
SPRINGS	
2700K - 4000K	
IP65	



CODE	3523-90A-B6W
FIXED DOWNLIGHT	
ADJUSTABILITY	NO
POWER LED	
MAX 6W	
8-32 Vdc - Driver on board	
FUSE - POLARITY REVERSE SPIKE FILTER	
YES	
WIDE	
LENS	
3000K CRI >80 LMN 254lm 1mt 132lx 2mt 33lx 3mt 15lx IP40	
BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND	
SPRINGS	
2700K - 4000K	
IP65	



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

seattle ag . 70









atlanta ag

. 80

. 90



CODE	3527-80A-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx 
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65


CODE	3527-90A-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx 
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

atlanta ag . 80



FINISHES	20 4 34 
----------	--







charlotte ag

. 55

. 70

. 80

. 90 ag



CODE	3522-55A-B1.5W 3522-55C-B1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1.5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 77lm 1mt 46lx 2mt 11lx 3mt 5lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65

CODE	3522-70A-B2W 3522-70C-B2W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65
	*On request switch on the frame

CODE	3522-80A-B4W 3522-80C-B4W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65
	*On request switch on the frame

CODE	3522-90A-B6W 3522-90C-B6W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 6W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 254lm 1mt 132lx 2mt 33lx 3mt 15lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65
	*On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

charlotte ag . 80



*switch







daytona ag

. 80

. 90



CODE	3526-80A-B2W 3526-80C-B2W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 2W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 184lm 1mt 59lx 2mt 15lx 3mt 7lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65 *On request switch on the frame

CODE	3526-90A-B4W 3526-90C-B4W
FIXTURE	ADJUSTABLE DOWNLIGHT
ADJUSTABILITY	25°
LIGHT SOURCE	POWER LED
POWER	MAX 4W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 230lm 1mt 99lx 2mt 25lx 3mt 11 lx
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	(A) SPRINGS (C) SCREWS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP 65 *On request switch on the frame



"INNER CONE MADE FROM RECYCLED PLASTIC DERIVED FROM RECLAIMED SEA FISHING NETS"

daytona ag . 90




*switch






tampa ag


. 40




CODE	3528-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 66lm 1mt 46lx 2mt 11lx 3mt 5lx 
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65

sarasota ag

. 40



CODE	3529-40-Z1.5W
FIXTURE	FIXED DOWNLIGHT
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	MAX 1,5W
SUPPLY	8-32 Vdc - Driver on board
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER
DIMMABLE	YES
BEAM	WIDE
SCREEN	LENS
LED COLOUR	3000K CRI >80 LMN 66lm 1mt 46lx 2mt 11lx 3mt 5lx 
IP RATE	IP40
WEIGHT	
MATERIALS	BODY: STAINLESS STEEL AISI 316 HEATSINK: SPECIAL COMPOUND
MOUNTING SYSTEM	SPRINGS
OPTIONAL	
LED COLOUR	2700K - 4000K
IP RATE	IP65



tampa ag



sarasota ag

"INNER CONE MADE FROM
RECYCLED PLASTIC DERIVED FROM
RECLAIMED SEA FISHING NETS"








black neonflex

. small


. side

. top



CODE	5418-1MT-10WM 5418-2MT-10WM 5418-3MT-10WM 5418-4MT-10WM 5418-5MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL LED COLOUR	2700K - 3000K - 4000K
IP RATE	

12Vdc available on request.
Other sizes available on request.



CODE	5417-1MT-10WM 5417-2MT-10WM 5417-3MT-10WM 5417-4MT-10WM 5417-5MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL LED COLOUR	2700K - 3000K - 4000K
IP RATE	

12Vdc available on request.
Other sizes available on request.




CODE	5416-1MT-10WM 5416-2MT-10WM 5416-3MT-10WM 5416-4MT-10WM 5416-5MT-10WM
FIXTURE	FLEXIBLE LED
ADJUSTABILITY	NO
LIGHT SOURCE	POWER LED
POWER	10W/MT
SUPPLY	24 Vdc
PROTECTION	PROTECTION POLARITY REVERSE
DIMMABLE	YES
BEAM	WIDE
SCREEN	BLACK
LED COLOUR	3000K CRI >90 LMN
IP RATE	IP67
WEIGHT	
MATERIALS	SILICONE
MOUNTING SYSTEM	CLIPS
OPTIONAL LED COLOUR	2700K - 3000K - 4000K
IP RATE	

12Vdc available on request.
Other sizes available on request.




blade three black




three . A




CODE	5070-P02-23
FIXTURE	
BEAM	
SCREEN	FUMÉ
LED COLOUR	
IP RATE	
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC02 
PLASTIC CLIP	5070-PC02 
METAL CLIP	5070-MC02 

three . B



CODE	5070-P04-23
FIXTURE	
BEAM	
SCREEN	FUMÉ
LED COLOUR	
IP RATE	
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC04 
PLASTIC CLIP	5070-PC04 
METAL CLIP	5070-MC04 


three . C





CODE	5070-P09-23
FIXTURE	
BEAM	
SCREEN	FUMÉ
LED COLOUR	
IP RATE	
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC09 
PLASTIC CLIP	
METAL CLIP	5070-MC09 


mini blade black

one . A




CODE	5070-P06-23
FIXTURE	
BEAM	
SCREEN	FUMÉ
LED COLOUR	
IP RATE	
MATERIALS	BODY: BLACK ANODIZED ALUMINIUM
MOUNTING SYSTEM	SCREWS
ACCESSORIES	
CAPS 2X	5070-PEC06 
PLASTIC CLIP	
METAL CLIP	5070-MC06 

A

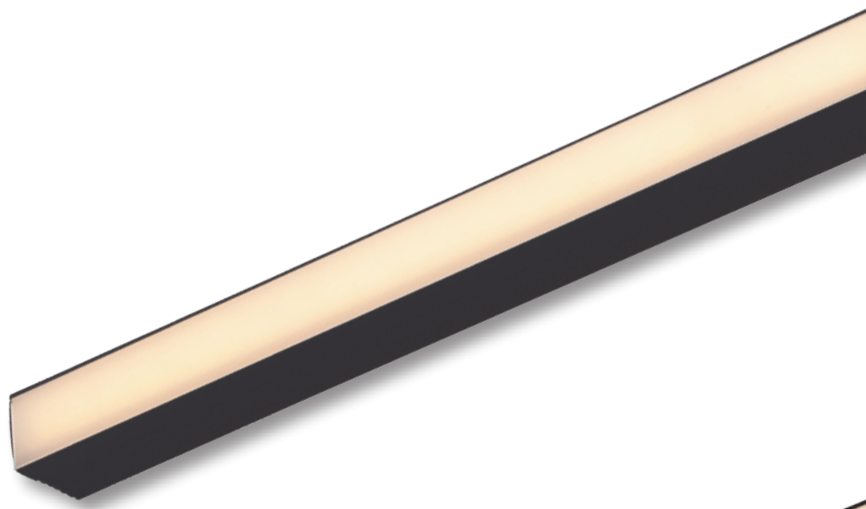


mini blade black


A

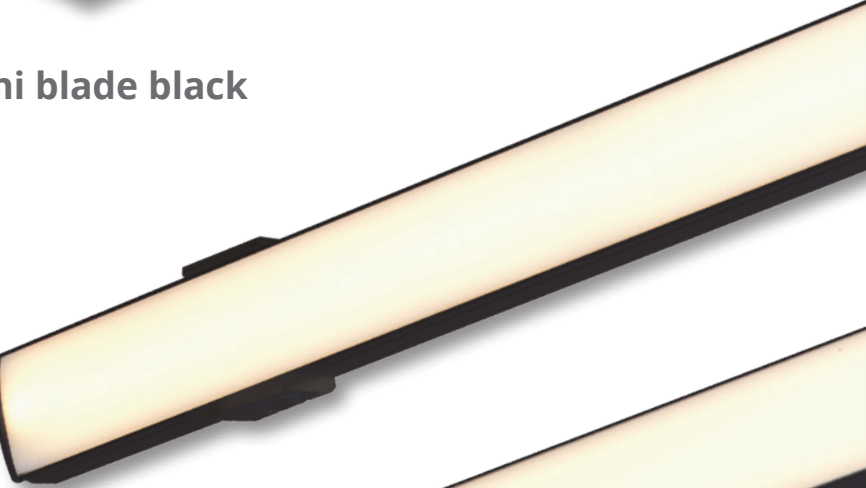

B

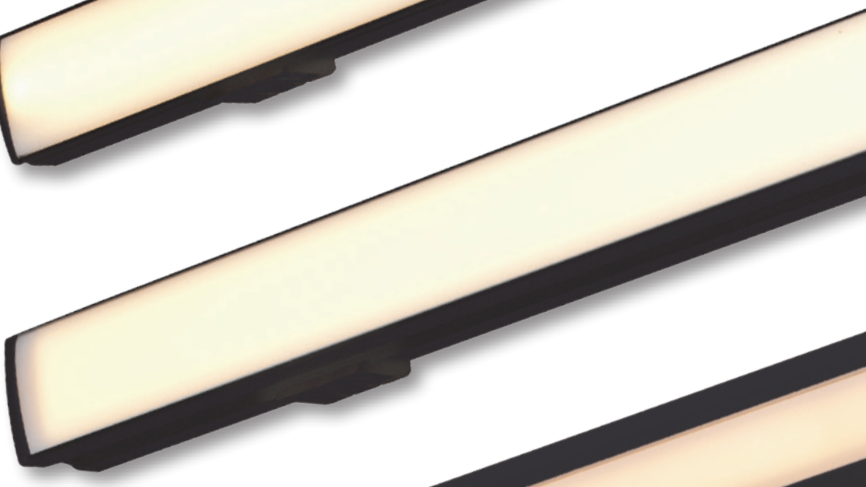

C

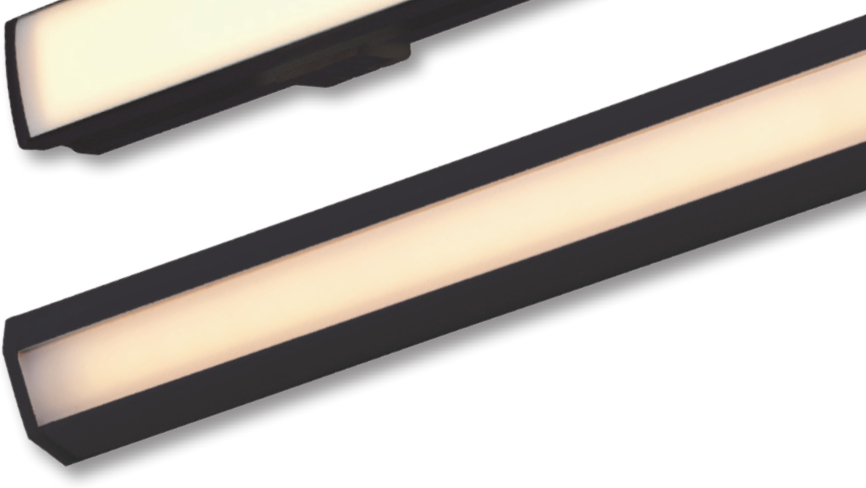

blade three black

Desideriamo ringraziare tutti coloro che nella lunga storia della nostra azienda hanno contribuito con capacità, serietà e impegno a fare del marchio BCM il riferimento di eccellenza nella produzione di apparecchi per illuminazione. Un successo la cui parte integrante sono i nostri clienti, tra i più prestigiosi cantieri e designers nel settore della nautica, importanti architetti e operatori nel settore residenziale e "contract", che continuano a privilegiare la scelta dei nostri prodotti ritenendoli esempio di stile, affidabilità e sicurezza.

We wish to thank all those who in the long history of our company have contributed with ability, professionalism and commitment towards making the BCM brand a landmark of excellence in the production of lighting fixtures. Our customers, who form an integral part of our success and include the most prestigious shipyards and designers in the nautical field, as well as important architects and operators in the residential and "contract" sectors, continue to prefer our range of products for their cutting-edge style, reliability and safety.



L'azienda si riserva il diritto, in qualsiasi momento e senza preavviso, di eliminare gli articoli che riterrà opportuno e/o di apportare tutte le modifiche atte a migliorare il prodotto. Non può inoltre assumersi responsabilità per eventuali inesattezze del presente catalogo dovute ad errori di stampa, trascrizione e traduzione.

The company reserves, at any moment and without prior notice, the right to discontinue producing or to modify whichever item with the purpose of improving quality. The company can not take the responsibility for any errors present in this catalogue due to misprint, mistakes in copying and translation.

BCM illuminazione srl

Via G. Pastore, 2
55041 Capezzano Pianore
Lucca • Italia
Tel. +39 0584 969632
Fax +39 0584 969578

www.bcmilluminazione.com
info@bcmilluminazione.com

Art Direction and Supervision
GERECON ITALIA • Edoardo Brogini

©BCM illuminazione 2024



