




ELECTRICAL PROPERTIES

		
POWER	6W	
SUPPLY	COSTANT VOLTAGE 8-32 VDC (DRIVER ON BOARD)	
PROTECTION	FUSE - POLARITY REVERSE SPIKE FILTER	
DIMMABLE	YES	
LIGHT SOURCE	OSRAM POWER LED	
LED COLOUR	3000K, 3000K+RED	






MIAMI A90

3405/K6W-A90




MECHANICAL PROPERTIES

	
IP RATE	IP66
FIXTURE	FIXED DOWNLIGHT FOR EXTERIOR/INTERIOR
FRAME	AISI 316L
HEATSINK	SPECIAL COMPOUND
SCREEN	OPAL
MOUNTING SYSTEM	SPRINGS

COLOUR	3000K	BEAM	90°
CRI	>80		
LUMEN OUTPUT	550 lm		
LIGHTNESS 1mt	254 lx		
LIGHTNESS 2mt	63 lx		
LIGHTNESS 3mt	28 lx		

FINISHES

POLISHED S.STEEL
BRUSHED S.STEEL
WHITE S.STEEL

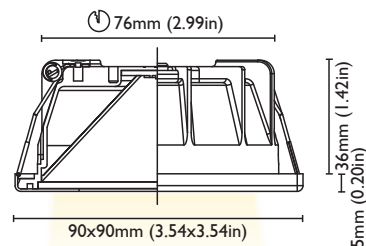

CUT OUT	76 mm (2.99in)
FRAME	90x90 mm (3.54x3.54in)
DEPTH	36 mm (1.42in)
REFLECTOR ADJUSTABILITY	NO